




PCT/GB 2003 / 001558



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Stephen Hordley

Dated 12 May 2003

BEST AVAILABLE COPY

An Executive Agency of the Department of Trade and Industry



1/77

THE PATENT OFFICE

15APR02 E710854-2 D01559
P01/7700 0.00-0208541.3

B

13 APR 2002

NEWPORT

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

WJN/IRJ/AD/JWC

2. Patent application number

(The Patent Office will fill in this p

0208541.3

13 APR 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

John William Collins
The Barn
Mill Lane
Castleton
Cardiff
CF8 8UT

John Raymond Collins
The Barn
Mill Lane
Castleton
Cardiff
CF8 8UT

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

6741/44001

7835663002

4. Title of the invention

Roofing Information Indicating Device

5. Name of your agent (if you have one)

Wynne-Jones, Laine & James

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Morgan Arcade Chambers
33 St Mary Street
Cardiff
CF10 1AF
United Kingdom

Patents ADP number (if you know it)

1792002

6. If you are declaring priority from one or more earlier patent applications, give the country, and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number.

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

--

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

--

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

No

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77


9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 13

Claim(s) -

Abstract -

Drawing(s) 5 + 5 

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) -

Request for substantive examination (Patents Form 10/77) -

Any other documents (please specify) -

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

WYNNE-JONES, LAINE & JAMES

12th April 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr W J Newell

029 2022 9526

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

Roofing Information Indicating Device

The present invention relates to a device for providing an indication of roofing related information.

5 It is of great importance that the components used for constructing a roof have correct dimensions, otherwise the consequences can be expensive and dangerous. As calculating the dimensions is quite complex, it is common for builders to use reference books or trial and error. There are also some tools available, but these require
10 skill and training to use. Each page of such reference books contain tables showing the correct dimensions for various types of bevels of rafters and the like for a roof of a given pitch. Unfortunately, due to the amount of data contained in such books, obtaining the information can be a
15 time consuming process and the data needed may be spread over more than one page. This method is prone to human error if information collected from several pages is written down incorrectly.

20 Embodiments of the present invention aim to provide a device that allows several pieces of roofing related information to be obtained quickly and easily.

According to the present invention there is provided a device for providing an indication of roofing related information, the device including:

25 a first component including:

a first set of roofing related information, and

at least one further set of roofing related information,

the positions⁴ of the information sets having a predetermined relationship to one another on the first component, and

a second component pivotally connected for relative rotary movement to the first component, the second component having a first information display position for indicating a selected member of the first information set and at least one further information display position for indicating the related member of the at least one further information set.

All or some of the information display positions may be located at or near an edge of the second component. Thus, the desired information can be viewed by rotating the first component relative to the second such that a member of the first information set is substantially aligned with the edge acting as the first information display position, with the related member(s) of the at least one further information set(s) being substantially aligned with the edge(s) acting as the further information display position(s). Alternatively or additionally, the information display positions may include one or more apertures forming windows in the second component so that the members of the information sets can be viewed through the windows. One or more of the information display positions may be labelled. Illustrations relating to the

information displayed may also be provided on the device. The information display positions and/or the members of the different information sets may be set out in a way intended to help distinguish between them. For example, the set members may be printed on or in different colours.

The first and second components may be substantially arc-shaped segments, which are typically substantially flat. In this case, the members of the information sets on the first component can be arranged in arcs located at intervals along the radial distance of the first component, with the corresponding information display positions being arranged at corresponding intervals along the radial distance of the second component.

In one embodiment, information sets are included on two opposite sides of the first component. Suitably, the second component can be formed of two parts at least partially spaced apart, such that the first component can fit and rotate between the two parts. The size of the first component may be marginally smaller (e.g. up to around 5mm) to allow it to fit within an envelope or sleeve defined by the two parts of the second component to facilitate this.

Information display positions corresponding to the information sets included on a first side of the first component may be provided on one of the parts of the second component. Information display positions for the information sets included on the opposite side of the first

component may be provided on the other part of the second component.

One embodiment of the device further includes a third component pivotally connected to the second component at a second axis for relative rotary movement, the third component including at least one information set. The third component may be substantially circular or arc-shaped. The display positions for the information set(s) of the third component may be in the form of at least one window in the second component.

An edge of the first component may include one or more foldable portions for facilitating alignment with the edge of a workpiece.

The information sets can include data relating to some or all of the following: the pitch of the roof; the length of a rafter (per metre run); the length of a hip rafter (per metre run); the plumb cut for common and/or jack rafters; the edge cut to purlin; the side cut of purlin; the hip or valley plumb cut; the common rafter plumb cuts; the jack rafter edge cut; the bottom edge jack against lay board angle; the top edge cut of a hip rafter; the seat cut hip or valley; the seat cut common (and/or jack) rafter; the bottom edge jack against a lay board; the top edge cut of a hip rafter.

The device may include representations of roof constructions, typically printed on the second component.

Instructions for using the device may be included on the

device. The device may be formed of paper, card, plastic and/or metal materials.

Whilst the invention has been described above, it extends to any inventive combination of the features set out above or in the following description.

The invention may be performed in various ways, and, by way of example only, an embodiment thereof will now be described, reference being made to the accompanying drawings, in which:-

Figure 1 is a view of the first sides the first and second components of the device with the second component fully extended for ease of description;

Figures 2 to 4 detail representations of roofing timbers and cuts printed on the first side of the second component;

Figure 5 is a schematic diagram showing the device in use with a workpiece;

Figure 6 is a view of the opposite side of the first and second components, again with the second component fully extended and showing a window for viewing an information set on a third component;

Figures 7 to 9 detail representations of roofing timbers and cuts printed on the second side of the second component, and

Figure 10 is a view of the third component.

Referring to Figure 1, the indicating device comprises a first substantially arc-shaped segment 1 of card having a

radius of around 215 mm and an arc angle of approximately 90°. It will be understood that any of the device dimensions given herein are examples only and wide variations are possible according to the nature of the device and workpiece. The device further includes a second segment 2 comprising two sheets of card, having dimensions substantially identical to the first.

A common pivot 3 allows the two segments 1, 2 to rotate relative to each other with the single sheet first component sandwiched between the two cards of the second component. The pivot 3 can be a pin, eyelet or the like. The second segment 2 is shaped such that a square-shaped protrusion is located at its corner near the pivot 3 to limit the rotation of the first segment 1.

Arranged along the perimeter of the arc of the first side of the first segment 1 is a printed information set in the form of an indicia 4 representing angles between 0 and 90°. The indicia 4 is printed on an arc-shaped band of a first colour, e.g. purple, that extends to around 22 mm (in this example) along the radial distance from the edge of the arc. A label "Plumb Cut for Common and Jack Rafters" is printed at the bottom of the coloured band. At a generally corresponding radial distance (around 25 mm in the example) near one edge (chord) of the second segment 2 a label 6 "Common Rafter Plumb Cut" is printed. An illustration 6A (detailed in Figure 2) provides a representation of the cut.

The edge of the segment 2 adjacent the label 6 is intended to be used as an information display position. That is, when the device is being used a user rotates the segments relative to each other so that a line of the indicia 4 corresponding to the required pitch angle of the roof being constructed is substantially aligned with the information display position, so that the angle formed between a datum line 7 defined by the extended edge of the first segment and the datum line 8 defined on the second segment 2 represents the Common Rafter Plumb Cut angle.

The first segment 1 further includes a second indicia 9 representing angles between 16 and 60°. The indicia 9 are printed along an arc having a radial distance of between 24 mm and 47 mm on the first segment 1. Similarly to the first indicia 4, the second indicia 9 is printed on a coloured band (preferably of a different colour, e.g. orange) which includes a label "Edge Cut to Purlin" at its base. It will be understood that the other indicia on (both sides of) the first segment 1 can be printed on coloured bands and can have labels arranged in a similar manner. The colours of adjacent bands preferably contrast with each other. A corresponding label 10 is printed at a generally corresponding radial distance near the edge of the second segment 2. An illustration 10A (detailed in Figure 3) provides a representation of the cut.

The indicia 9 are aligned so that, when the appropriate pitch angle from the indicia is aligned with

the edge defining the information display position, the angle defined between the datum lines 7 and 8 is the required angle for the jack rafter edge cut for a roof of that pitch angle.

5 A third set of indicia 12 representing angles 16 to 60° is printed along a coloured arc-shaped band having a radial distance of between 61 mm and 85 mm on the first segment 1. A corresponding label 14 "Side Cut of Purlin" is printed at a generally corresponding radial distance
10 near the edge of the second segment 2. An illustration 14A (detailed in Figure 4) provides a representation of the cut. A fourth set of indicia 16 is printed in a coloured arc-shaped band having a radial distance of between 91 mm and 116 mm on the first segment 1. A label 18 "Hip and
15 Valley Plumb Cut" is printed at a generally corresponding radial distance near the edge of the second segment 2.

 To determine the appropriate angle for a given cut, the user notes the label 6, 10, 14, 18 identifying that cut and then pivots the device to align the indicia identifying
20 the pitch angle of the roof (measured previously) with the information display position (i.e. edge) adjacent the label. The datum lines 7 and 8 then define between them the particular angle of cut which can then be marked on the rafter or the workpiece being cut. Figure 5 shows the
25 device in use with a workpiece 19.

 The segment 2 also includes two representations 19A, 19B of a workpiece 19 in a roof construction. The first one 19A

shows the roof pitch and run, a wall plate, the ridge and the common rafter. The second representation 19B shows the common rafter and the run for a lean-to roof.

Directions 19C for using the indicating device are also printed on the second side of the segment 2. The directions 19C can include an illustration of the device in use (similar to Figure 5) and may read as follows:

"...For example, if you need to cut a roof with a 30° pitch, place the device against the timber as illustrated in FIGURE.

To mark the plumb cut on a common rafter, slide the device open until the coloured band marked Plumb Cut for Common and Jack Rafters reads 30. This then gives you the plumb cut for a common rafter on a roof at a 30° pitch. Simply mark the timber along the line indicated 'mark all cuts here'.

To mark the seat cut on a common rafter, simply follow the instructions above except this time, open the device until the number 30 is alongside the coloured band marked Seat Cut Common Rafter (this gives the seat cut for a common rafter on a roof with a 30° pitch). Again mark the timber along the indicated edge. Follow these steps for all other cuts required..."

To assist alignment of this device, the first segment 1 preferably has one or more foldable flap attached to the datum line 7 and foldable about that line. In the

embodiment illustrated, there are four separate flaps 20. In use the user may fold one or more of the flaps 20 over the edge of the workpiece to help ensure that datum line 3 is accurately aligned therewith. The flaps have tabs 21
5 that fit into corresponding slots 22 in the segment 1. The angle of the cut may then be marked on the workpiece by running a pencil or scribe along the datum edge 8 once the appropriate pitch angle has been dialled in. The datum edge 8 is marked (on both sides) "Mark All Cut Along this
10 Line" and the datum edge 3 is marked (on both sides) "Timber Goes Here" for ease of use.

It will be appreciated also that it is possible to use this device to mark up compound cuts on rafters, that is ones where the cutting plane is not perpendicular to any of
15 the surfaces of the workpiece. Having more than one separate flap 20 allows them to be folded onto different faces of the workpiece, thereby making the marking of compound cuts easier.

A semi-circular tab 23 (marked on both sides with
20 "Slide to Open") protrudes from the edge of the second segment 2 to make rotation of the two segments easier.

Referring to Figure 6, in a similar manner, there are further sets of indicia 24, 26 and 28 printed on the second side of the first segment 1. Corresponding labels 30
25 ("Bottom Edge Jack against Lay Board; Jack Rafter Edge; Top Edge Cut of Hip Rafter"), 32 ("Seat Cut Hip or Valley") and

34 ("Back Cut Common and Jack Rafters") and corresponding

illustrations 30A, 32A and 34A (detailed in Figures 7, 8 and 9, respectively) are printed on the second side of the second segment 2. These further indicia and labels allow the angles indicated by the labels to be determined, with the resultant angle being defined between the datum lines 7 and 8 as previously described.

The second side of the segment 2 further includes a window 36. Adjacent the sides of the window 36, three labels 38, 40, 42 are printed. Each of the labels corresponds to a field of four sets of information printed on a disc-shaped card 44, which is illustrated in Figure 10.

The centre of the disc 44 is attached to the piece of card forming the second side of the segment 2 by means of a pivot 46. The pivot 46 and window 36 are located on the second segment 2 such that a part of the circumference of the disc 44 protrudes beyond the outer arc edge of the segment 2. The user uses the protruding part to rotate the disc 44. A notch is cut into part of the arc edge of the segment 2 to help a user grip the disc 44.

The disc 44 is divided in the example into 42 equal segments, each of which contains information relating to a roof having a pitch of between 16 and 58°. In an alternative embodiment, information for roofs having pitches of 16 to 60° is included on the disc. The values of the pitch angles are printed as indicia 48 arranged around the circumference of the disc.

Second and third sets of indicia 50, 52 are printed concentrically and indicia is printed inwardly of the others. The rings of the three indicia are of different colour to help distinguish between them.

5 The values of the two indicia 50, 52 printed in one segment of the disc give the correct values of specific dimensions (mentioned below) for a roof pitch of an angle represented by the indicia 48 appearing in the same segment.

10 In use, the roof pitch angle is selected by rotating the disc 44 so that the segment containing desired angle is shown in the window 36. The selected angle of the indicia 48 is substantially aligned with the label 38 ("Pitch of Roof"). The labels 40 ("Length of Rafter Per metre run")
15 and 42 ("Length of Hip Rafter Per meter run") are printed adjacent the window 36 at positions generally corresponding to where the values of the two indicia 50, 52, respectively, of the segment can be viewed.

20 Also printed on the second side of the second segment 2 is a representation 55 of parts of a roof construction that can act as an aid for working out what information is needed. The representation 55 shows a common rafter, the full span of the roof, a purlin, the pitch of the roof, the run of the rafter, the ridge board and the overhang.

25 Directions 56 for using the indicating device can also be printed on the second side of the segment 2. These may read as follows:


"To calculate the length of your common rafter gently turn the wheel to the required pitch of the roof (in the top band of the wheel) and multiply the given length per metre run by the run of the rafter...

5 For example, suppose you are cutting a roof with a 30° pitch and the run of the rafter was 4m, multiply 4 by 1.155 (the middle band on the wheel next to Length of the Rafter). This will give you the true length of the common rafter. Add on the overhang of the soffit as required.



10 To find the true length of the hip rafter, follow the steps above, this time without deducting half the thickness of the ridge as hip rafters fit against each other at the ridge.

15 Note: the run of rafter is measured horizontally as shown, and not along the length of the rafter."

20 The layout and spacing of the indicia representing the roof pitch may be determined empirically, by calculation or by looking up in a reference book and then setting the datum lines to the appropriate cut angle and marking the corresponding roof pitch angle on the first segment, and repeating this for reach of the roof pitch angles likely to be of interest. This exercise can be repeated for all the cut angles which the device is required to provide.

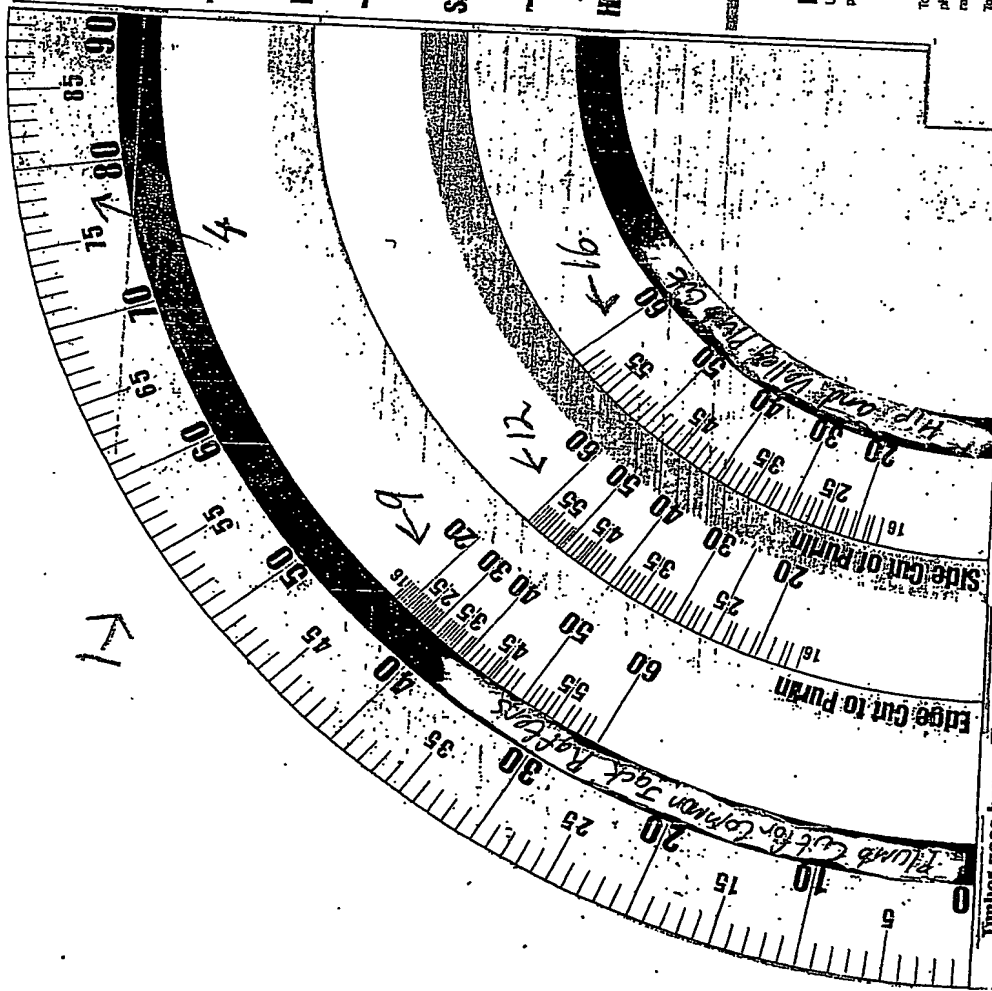

Timber goes here • Timber goes here • Timber goes here

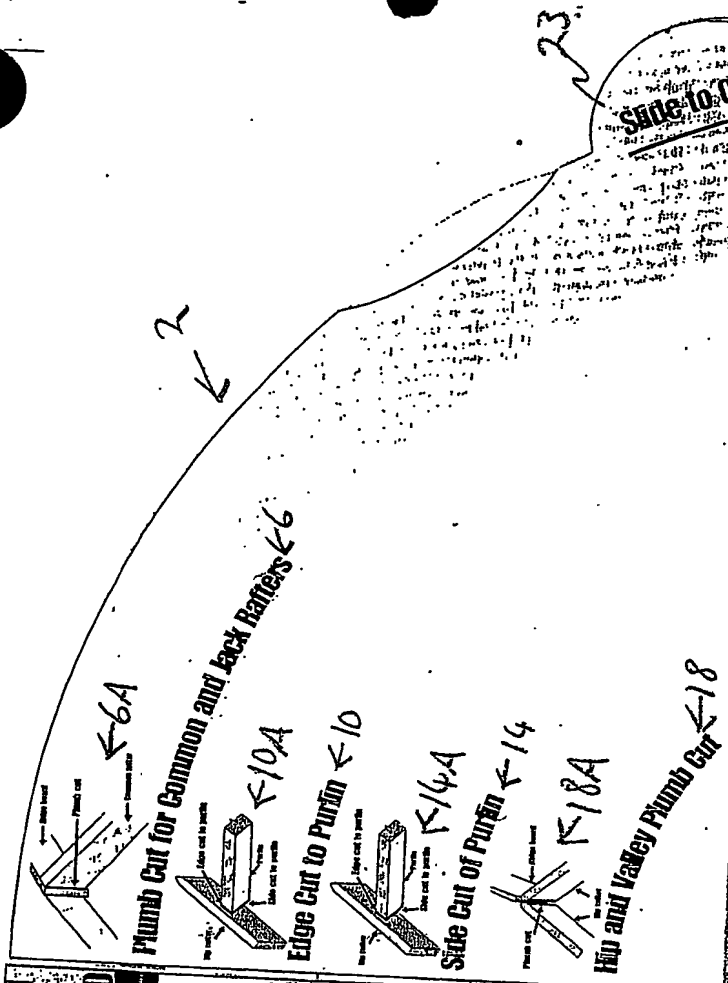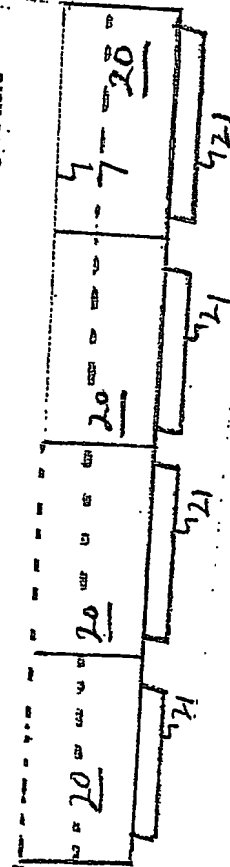

How to use the ROOFFAST™

Using the ROOFFAST™ could not be simpler. For example, if you need to cut a roof with a 30° pitch, place the ROOFFAST™ against the timber as illustrated in figure 1.



Figure 1


To mark the plumb cut on a common rafter, slide the ROOFFAST™ open until the coloured band marked plumb cut for common and jack rafters reads 30. This then gives you the plumb cut for a common rafter on a roof at a 30° pitch. Simply mark the timber along the line indicated mark all cuts here.

To mark the seat cut on a common rafter, simply follow the instructions above except this time, open the ROOFFAST™ until the number 30 is alongside the coloured band marked seat cut common rafter (this gives the seat cut for a common rafter on a roof with a 30° pitch). Again mark timber along indicated edge. Follow these steps for all other cuts required. The ROOFFAST™ makes cutting a roof faster, safer and easier.

Mark all cuts along this line • Mark all cuts along this line • Mark all cuts along this line


2/5

Plumb Cut for Common and Jack rafters

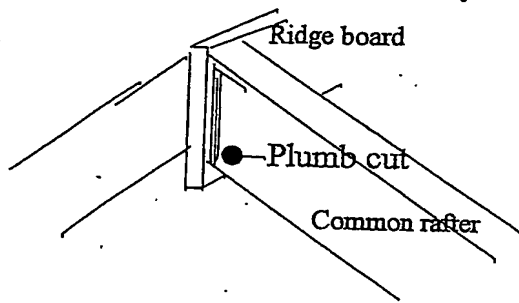

← 6A

FIG. 2

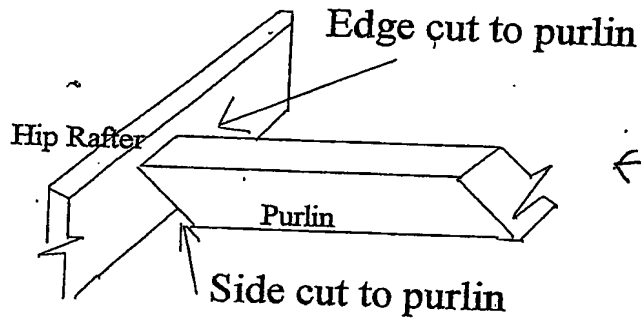


Edge Cut to Purlin

← 10A

Side Cut of Purlin

FIG. 3

Hip and Valley
Plumb Cut

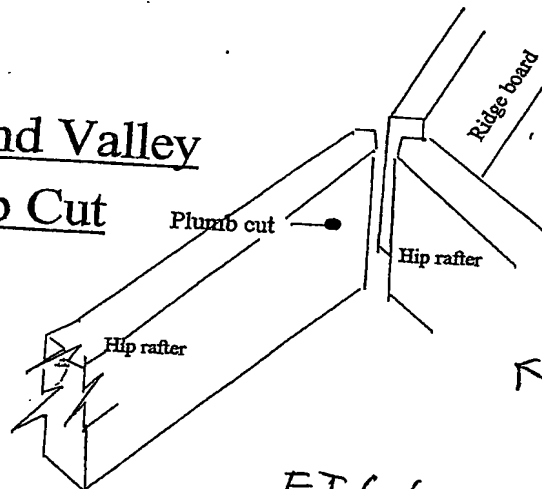

← 14A

FIG. 4

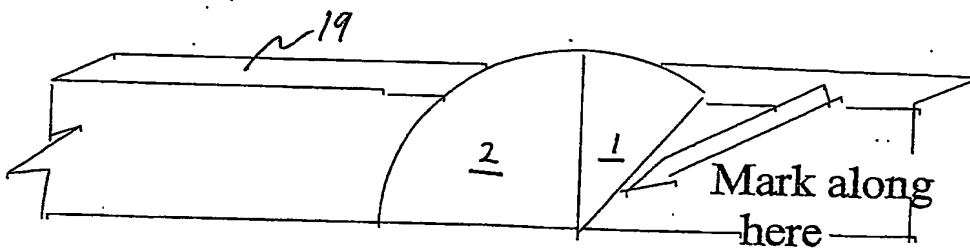


FIG. 5

3/5

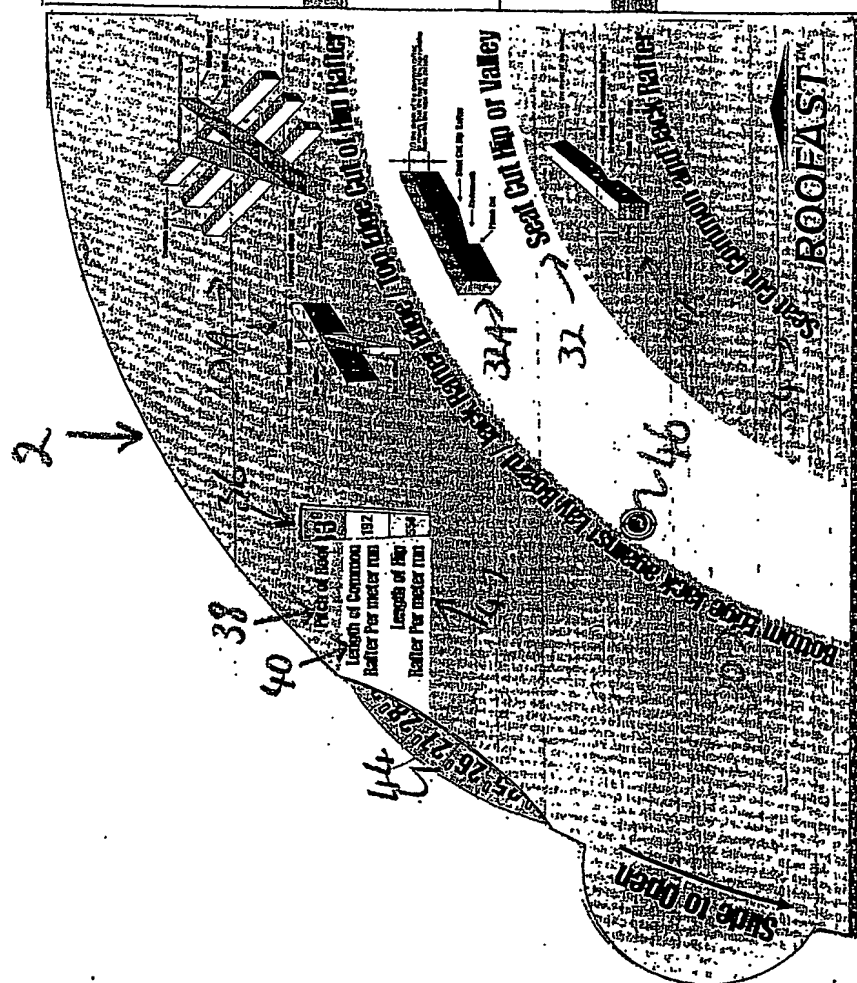


Figure 2

How to use the rafter wheel calculator *256*



To calculate the length of your common rafter gently turn the wheel to the required pitch of the roof on the top band of this wheel and multiply the given length per metre run by the run of the rafter, as highlighted in blue in figures 2.

For example, suppose you are cutting a roof with a 30° pitch and the run of the rafter was 4m, multiply 4 by 1.155 (the middle band on the wheel next to Length of Rafter). This will give you the true length of the common rafter. Add on the overhang of the soffit as required.

To find the true length of the hip rafter, follow the steps above this time without deducting half the thickness of the ridge as hip rafters fit against each other at the ridge.

Note: the run of rafter is measured horizontally as shown, and NOT along the length of the rafter.

Mark all cuts along this line • Mark all cuts along this line • Mark all cuts along this line

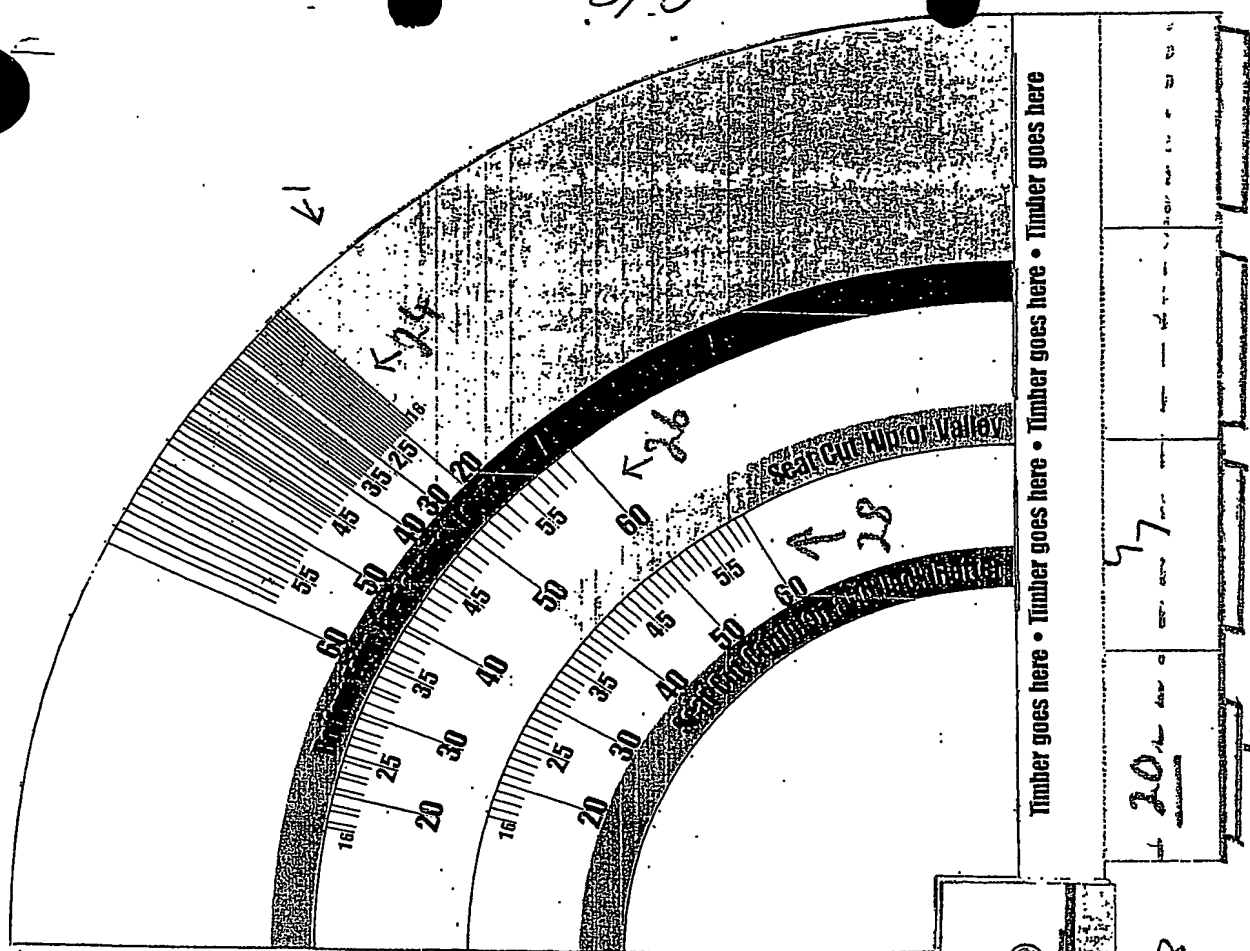

Timber goes here • Timber goes here • Timber goes here • Timber goes here

5 8 3

20 17

FIG. 6

4/5

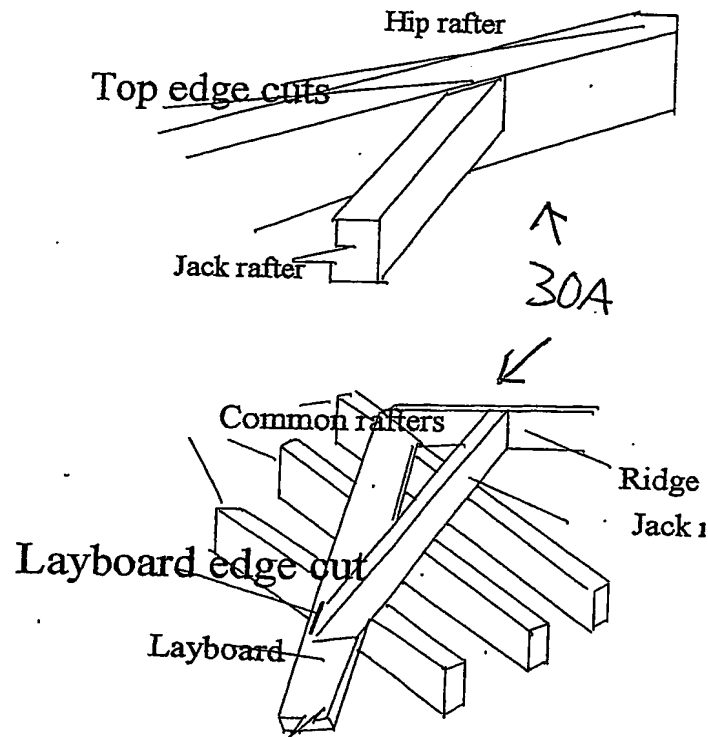


FIG. 7

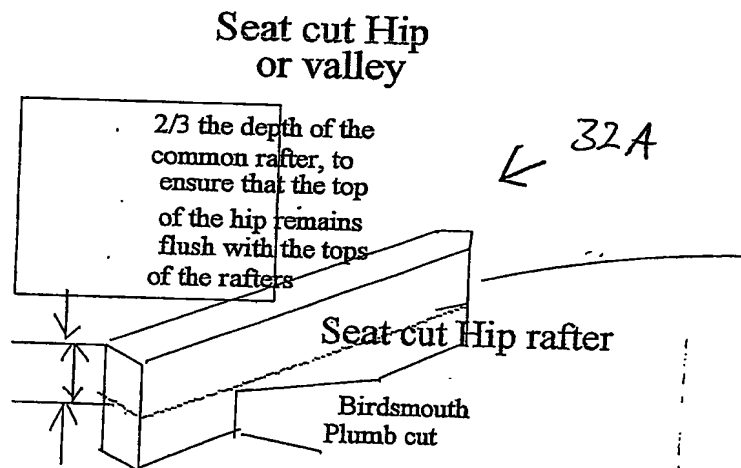


FIG. 8

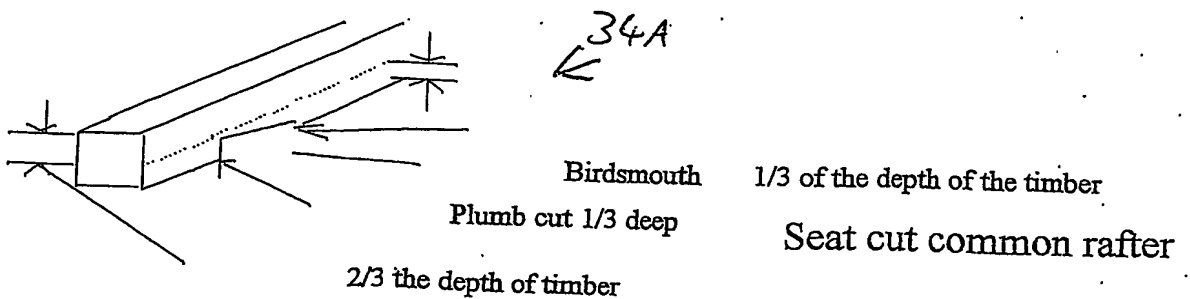


FIG. 9

A circular slide rule, likely a nomogram for trigonometric or logarithmic calculations. The outer edge is marked with degrees from 0° to 90° in both directions. The interior features several concentric scales with numerical values. Handwritten numbers 44, 48, 50, and 52 are visible on the right side, possibly indicating specific values or angles.

Figure 1

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.